

# LEDlescent™ T8 Ballast-Free Lamps

Internal Driver/Line Voltage Linear LED T8 Lamp



LEDlescent T8 Ballast-Free lamps are an energy saving alternative, designed to replace traditional fluorescent T8/T12 lamps by bypassing the existing ballast. These LED T8 lamps contain no mercury, provide instant light and a uniform light distribution.

Engineered to operate directly on 120-277V, these lamps minimize labor and recycling costs. These lamps can be used with occupancy and vacancy sensors for enhanced energy savings.

## Key Features & Benefits

- Optimized glass optics available in 2ft, 3ft, and 4ft lengths
- CCT: 3000K, 3500K, 4100K, 5000K
- Beam angle: 220°
- Installed directly on 120-277V
- For use with shunted and un-shunted sockets
- Double ended: lamp is wired end-to-end
- THD <20%, power factor >0.90
- G13 medium bi-pin base
- Long life: 50,000 hour life (L<sub>70</sub>)
- Non-dimmable
- 5 year limited lamp warranty (24/7 operation)
- No warm-up time, instant-on with full light output and stable lamp to lamp color
- No UV emission
- Suitable for dry and damp locations (cannot come in direct contact with water)
- Maximize energy savings with occupancy sensors
- Suitable for open and enclosed fixtures

## Product Offering

Length	Color Temperature	CRI
48in.	3000K, 3500K, 4100K, 5000K	82
36in.	3000K, 3500K, 4100K, 5000K	82
24in.	3000K, 3500K, 4100K, 5000K	82

## Application Information

### Applications

- Cove lighting
- Display case
- General illumination
- Parking garage
- Tunnels

### Specifications and Certifications



## Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

## Specifications

### Energy Data

**Ambient Operating Temperature:** -4°F to 133°F (-20°C to 45°C)

**EMI/RFI:** FCC Title 47 CFR, Part 18, Non-Consumer

**Max Case Temperature:** 158°F (70°C)

### Lighting Data

**Lumen Output:** See specification table (output is dependent on operating ballast)

**Lumens per Watt:** Up to 150

**Correlated Color Temperature (CCT):** 3000K, 3500K, 4100K, 5000K

**Color Rendering Index (CRI):** 82

**R9:** Up to 14

## Ordering Information

Item Number	Ordering Abbreviation	Lamp Length	Lamp Power (W)	Color Lumens (lm)	Color Temp. (CCT)	CRI	Beam Angle (°)	Package Quantity	DLC (Y/N)
75024	LED17T8/L48/FG/830/BF	4ft	17	2100	3000K	82	220	25	Y
75025	LED17T8/L48/FG/835/BF	4ft	17	2100	3500K	82	220	25	Y
75026	LED17T8/L48/FG/841/BF	4ft	17	2200	4100K	82	220	25	Y
75027	LED17T8/L48/FG/850/BF	4ft	17	2200	5000K	82	220	25	Y
75020	LED14T8/L48/FG/830/BF	4ft	14	1700	3000K	82	220	25	Y
75021	LED14T8/L48/FG/835/BF	4ft	14	1700	3500K	82	220	25	Y
75022	LED14T8/L48/FG/841/BF	4ft	14	1800	4100K	82	220	25	Y
75023	LED14T8/L48/FG/850/BF	4ft	14	1800	5000K	82	220	25	Y
75005	LED12T8/L48/FG/830/BF	4ft	12	1700	3000K	82	220	25	Y
75006	LED12T8/L48/FG/835/BF	4ft	12	1700	3500K	82	220	25	Y
75007	LED12T8/L48/FG/841/BF	4ft	12	1800	4100K	82	220	25	Y
75008	LED12T8/L48/FG/850/BF	4ft	12	1800	5000K	82	220	25	Y
75009	LED12T8/L36/FG/830/BF	3ft	12	1650	3000K	82	220	25	-
75010	LED12T8/L36/FG/835/BF	3ft	12	1650	3500K	82	220	25	-
75011	LED12T8/L36/FG/841/BF	3ft	12	1650	4100K	82	220	25	-
75012	LED12T8/L36/FG/850/BF	3ft	12	1650	5000K	82	220	25	-
75013	LED9T8/L24/FG/830/BF	2ft	9	1100	3000K	82	220	25	Y
75014	LED9T8/L24/FG/835/BF	2ft	9	1100	3500K	82	220	25	Y
75015	LED9T8/L24/FG/841/BF	2ft	9	1100	4100K	82	220	25	Y
75016	LED9T8/L24/FG/850/BF	2ft	9	1100	5000K	82	220	25	Y

## Ordering Guide


LED	17	T8	/	L	48	/	FG	/	8	41	/	BF	/	G7
LED	Wattage	Lamp Type		Length	48 Inches		FG = frosted glass non-dimmable		CRI = 82	Color Temperature 41 = 4100K 30 = 3000K 35 = 3500K 50 = 5000K		LEDlescent™ T8 ballast-free lamps		Generation

## Application Information

### Application Notes

1. All installation, inspection, and maintenance of lighting fixtures should be done with the power to the fixture turned off. Lamps should be installed and operated in compliance with the National Electrical Code (NEC), Underwriters Laboratories Inc. (UL) requirements, and all applicable codes and regulations.
2. Insert and align tubes properly in lamp holders.
3. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
4. Operating temperature range between -4°F and 122°F (-20°C and 50°C).
5. Suitable for use in dry and damp environments.
6. Please read all installation instructions before attempting installation.
7. For detailed warranty information, please see [www.sylvania.com](http://www.sylvania.com).

## Assembly Diagram

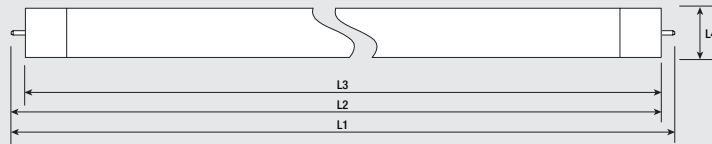

Product Description	L1 End of Base Pin to End of Opposite Pin End	L2 Base Face to End of Opposite Base Pin	L3 Base Face to Base Face	L4 Bulb Outside Diameter
LED/L48	47.725" ± 0.055" (1212.2mm ± 1.4mm)	47.45" ± 0.05" (1205.25mm ± 1.25mm)	max 47.22" (1199.4mm)	1.02" ± 0.08" (25.9mm ± 2.0mm)
LED/L36	35.72" ± 0.055" (907.4mm ± 1.4mm)	35.45" ± 0.05" (900.45mm ± 1.25mm)	max 35.22" (894.6mm)	1.02" ± 0.08" (25.9mm ± 2.0mm)
LED/L24	23.72" ± 0.055" (602.6mm ± 1.4mm)	23.45" ± 0.05" (595.65mm ± 1.25mm)	max 23.22" (589.8mm)	1.02" ± 0.08" (25.9mm ± 2.0mm)

## Warranty

LEDlescent™ T8 Ballast-Free lamps are covered by the LED T8 Lamp Limited Warranty. For additional details, please visit [www.sylvania.com/warranty](http://www.sylvania.com/warranty).

LEDVANCE LLC  
 200 Ballardvale Street  
 Wilmington, MA 01887 USA  
 Phone 1-800-LIGHTBULB (1-800-544-4828)  
[www.sylvania.com](http://www.sylvania.com)

SYLVANIA and LEDVANCE are registered trademarks.  
 All other trademarks are those of their respective owners.  
 Licensee of product trademark SYLVANIA in general lighting.  
 Specifications subject to change without notice.

[/sylvania](https://twitter.com/sylvania) [/sylvania](https://facebook.com/sylvania)

